


LEVEL 2 LOW SPALL GLAZING

2-1806-LS

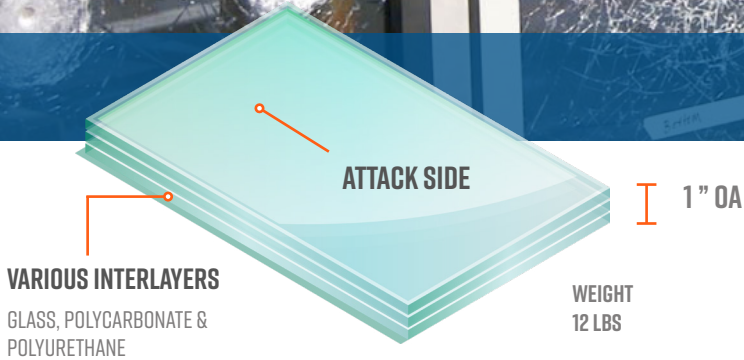

LEVEL 2 LOW SPALL GLAZING

2-1806-LS



TESTED TO
3 ROUNDS
OF .357
MAGNUM

SPECIFICATIONS

BALLISTIC RATING: MEETS OR EXCEEDS THE FOLLOWING

- UL752 LEVEL 2 BALLISTIC STANDARD

FRAMING OPTIONS

- ALUMINUM STORE FRONT
- ALUMINUM CURTAIN WALL

TECHNICAL DATA

THIS BALLISTIC GLAZING WILL WITHSTAND 3 ROUNDS OF .357 MAGNUM IN A ONE SQUARE FOOT SAMPLE, UTILIZING A JSP PROJECTILE WITH A MASS OF 158 GRAIN (10.24 GRAM) TRAVELING AT 1430 FEET / SECOND (436.2 METERS / SECOND) WITH EACH ROUND DELIVERING AN IMPACT OF 974 JOULES OF ENERGY AND A MOMENTUM OF 4.47 KG M/S. THIS BALLISTIC GLAZING MAY ALSO PROVIDE UP TO 30 MINUTES OF FORCED ENTRY PROTECTION.

SIZING INFORMATION

- UP TO 70" X 126"

TESTING CERTIFICATIONS

- BGA22002-5

- NOMINAL THICKNESS: 1"OA
- WEIGHT PER SQUARE FOOT: 12 LBS

