


LEVEL 5 LOW SPALL GLAZING

5-1814-LS



LEVEL 5 LOW SPALL GLAZING 5-1814-LS

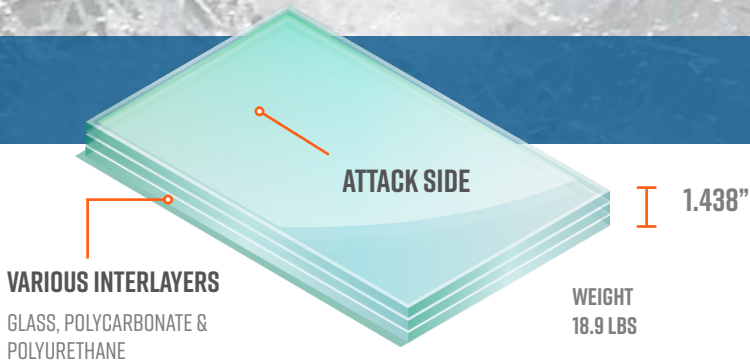

TESTED TO
**1 ROUND
OF .308**

SPECIFICATIONS

BALLISTIC RATING: MEETS OR EXCEEDS THE FOLLOWING

- UL752 LEVEL 5 BALLISTIC STANDARD

TECHNICAL DATA

THIS BALLISTIC GLAZING WILL WITHSTAND 1 ROUND OF .308 (7.62X51) IN A ONE SQUARE FOOT SAMPLE, UTILIZING A LEAD CORE PROJECTILE WITH A MASS OF 145 GRAIN (11.67 GRAM) TRAVELING AT 2780 FEET / SECOND (847.9 METERS / SECOND) WITH EACH ROUND DELIVERING AN IMPACT OF 3379 JOULES OF ENERGY AND A MOMENTUM OF 7.97 KG M/S. THIS BALLISTIC GLAZING MAY ALSO PROVIDE UP TO 30 MINUTES OF FORCED ENTRY PROTECTION.

- NOMINAL THICKNESS: 1 5/8"
- WEIGHT PER SQUARE FOOT: 17.3 LBS

FRAMING OPTIONS

- STEEL

SIZING INFORMATION

- UP TO 70" X 128"

TESTING CERTIFICATIONS

- BGAS0418208

