


LEVEL 7 LOW SPALL GLAZING

7-1817-LS

VARIOUS INTERLAYERS
GLASS, POLYCARBONATE &
POLYURETHANE

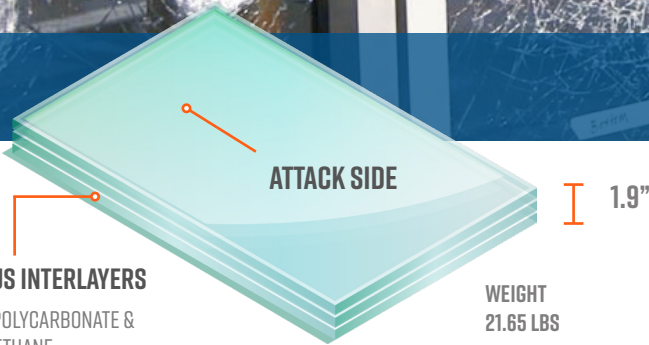

LEVEL 7 LOW SPALL GLAZING

7-1817-LS



TESTED TO
5 ROUNDS
OF 5.56

SPECIFICATIONS

BALLISTIC RATING: MEETS OR EXCEEDS THE FOLLOWING

- UL752 LEVEL 7 BALLISTIC STANDARD

TECHNICAL DATA

THIS BALLISTIC GLAZING WILL WITHSTAND 5 ROUNDS OF .223 (5.56) IN A ONE SQUARE FOOT SAMPLE, UTILIZING A FMJ PROJECTILE WITH A MASS OF 55 GRAIN (3.56 GRAM) TRAVELING AT 3234 FEET / SECOND (986.4 METERS / SECOND) WITH EACH ROUND DELIVERING AN IMPACT OF 731 JOULES OF ENERGY AND A MOMENTUM OF 3.51 KG M/S. THIS BALLISTIC GLAZING MAY ALSO PROVIDE UP TO 30 MINUTES OF FORCED ENTRY PROTECTION.

- NOMINAL THICKNESS: 1 7/8"; 1.9"; 48.26MM
- WEIGHT PER SQUARE FOOT: 21.65 LBS; 9.8291KG

FRAMING OPTIONS

- STEEL

SIZING INFORMATION

- UP TO 70" X 128"

TESTING CERTIFICATIONS

- BGAS0418229

