


# LEVEL 8 NO SPALL GLAZING 8-1819-NS



## LEVEL 8 NO SPALL GLAZING 8-1819-NS

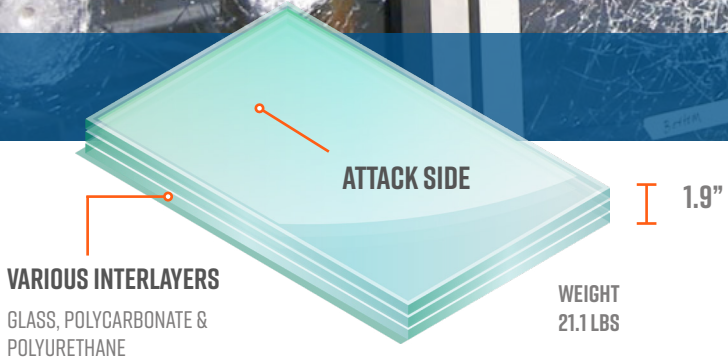

TESTED TO  
**5 ROUNDS  
OF .308**

### SPECIFICATIONS

#### BALLISTIC RATING: MEETS OR EXCEEDS THE FOLLOWING

- UL752 LEVEL 8 BALLISTIC STANDARD

#### TECHNICAL DATA

THIS BALLISTIC GLAZING WILL WITHSTAND 5 ROUNDS OF .308 (7.62X51) IN A ONE SQUARE FOOT SAMPLE, UTILIZING A LEAD CORE PROJECTILE WITH A MASS OF 145 GRAIN (11.67 GRAM) TRAVELING AT 2780 FEET / SECOND (847.9 METERS /SECOND) WITH EACH ROUND DELIVERING AN IMPACT OF 3379 JOULES OF ENERGY AND A MOMENTUM OF 7.97 KG M/S. THIS BALLISTIC GLAZING MAY ALSO PROVIDE UP TO 30 MINUTES OF FORCED ENTRY PROTECTION.

- NOMINAL THICKNESS: 1 15/16"; 1.9"; 48.26MM
- WEIGHT PER SQUARE FOOT: 21.1 LBS; 9.5794KG

#### FRAMING OPTIONS

- STEEL

#### SIZING INFORMATION

- UP TO 70" X 128"

#### TESTING CERTIFICATIONS

- BGAS0418203

