


LEVEL 8 LOW SPALL GLAZING

8-1820-LS

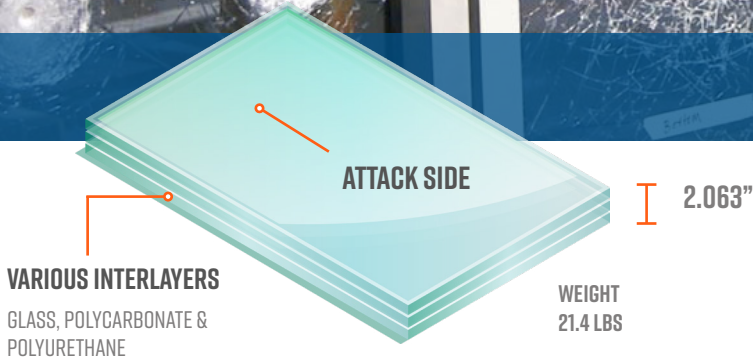

LEVEL 8 LOW SPALL GLAZING

8-1820-LS



TESTED TO
5 ROUNDS
OF **.308**

SPECIFICATIONS

BALLISTIC RATING: MEETS OR EXCEEDS THE FOLLOWING

- UL752 LEVEL 8 BALLISTIC STANDARD

TECHNICAL DATA

THIS BALLISTIC GLAZING WILL WITHSTAND 5 ROUNDS OF .308 (7.62X51) IN A ONE SQUARE FOOT SAMPLE, UTILIZING A LEAD CORE PROJECTILE WITH A MASS OF 145 GRAIN (11.67 GRAM) TRAVELING AT 2780 FEET / SECOND (847.9 METERS /SECOND) WITH EACH ROUND DELIVERING AN IMPACT OF 3379 JOULES OF ENERGY AND A MOMENTUM OF 7.97 KG M/S. THIS BALLISTIC GLAZING MAY ALSO PROVIDE UP TO 30 MINUTES OF FORCED ENTRY PROTECTION.

- NOMINAL THICKNESS: 2 1/16"; 2.063"; 52.4002MM
- WEIGHT PER SQUARE FOOT: 21.4 LBS; 9.7156KG

FRAMING OPTIONS

- STEEL

SIZING INFORMATION

- UP TO 70" X 128"

TESTING CERTIFICATIONS

- BGAS0418231

